

# Austbo®

歐の宝

# Water Heater

## 熱水の泉源


## 對衝式設計

## AT-10A 數碼恆溫熱水爐

## 揉合歐日高科技

## 帶出沐浴新享受

*European & Japanese Technology,  
Brings you new experience in bathing,*

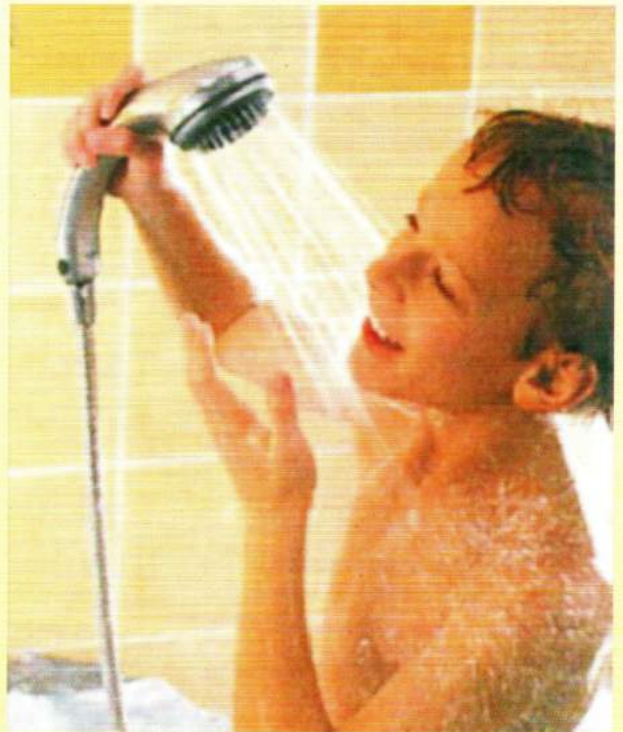

備有煤氣及石油氣型號以供選擇  
Both Town Gas & L.P. Gas Models are available



- 自動電子恆溫, 熱水供應量每分鐘達10公升  
*Automatic electronic control maintains constant water temperature, supplying 10 litres of hot water per minute*
- 即開即熱, 快捷方便  
*Electric continuous spark ignition, quick and convenient*
- 操作簡易, 節省能源  
*User-friendly operation, saves time as well as energy*
- 品質卓越, 確保安全可靠  
*Equipped with multi-functional safety device*



符合香港機電工程署 GU05規格  
Complied with the Hong Kong EMSD  
GU05 Safety Specification


★ 香港機電工程署建議: ★

選用合適出水量熱水爐供應特定的用途, 例如:  
10公升/每分鐘供應一浴室.

★ Suggested by Hong Kong EMSD: ★

Choose a water heater with suitable water capacity  
for specific usage, e.g.:  
10 litres / minute for 1 bathroom.

- 內備微電腦控制恆溫設計，並自動調節供氣量，確保水溫穩定。  
Automatic modulation for constant water temperature.
- 電子連續點火系統，無需燃點及保留火種，打開水龍頭即有熱水源源供應，方便兼節省能源。  
Electric continuous spark ignition, turn on the warm water hydrant for warm water output, no need to ignite or keep kindling.
- 煙通設計精巧怪，不論新安裝或更換安裝，同樣靈活方便。  
Electric continuous spark ignition, turn on the warm water hydrant for warm water output, no need to ignite or keep kindling.
- 獨具溫度調節器，可自由調校水溫38°C至60°C之間熱度悉隨尊便，操作容易。  
The user-friendly built-in water temperature control brings added ease to selecting water temperature. You can set the temperature within the range of 38°C to 60°C
- 配備可靠的熄火安全裝置、閃電保護安全裝置、過熱安全裝置、熱水高溫安全裝置、閃電保險絲及壓力排放閥，確保百分之百安全。  
Flame failure device, lightening surge protector, overheat prevention device, hot water high limit device, electric fuse and pressure relief valve, safe and reliable.

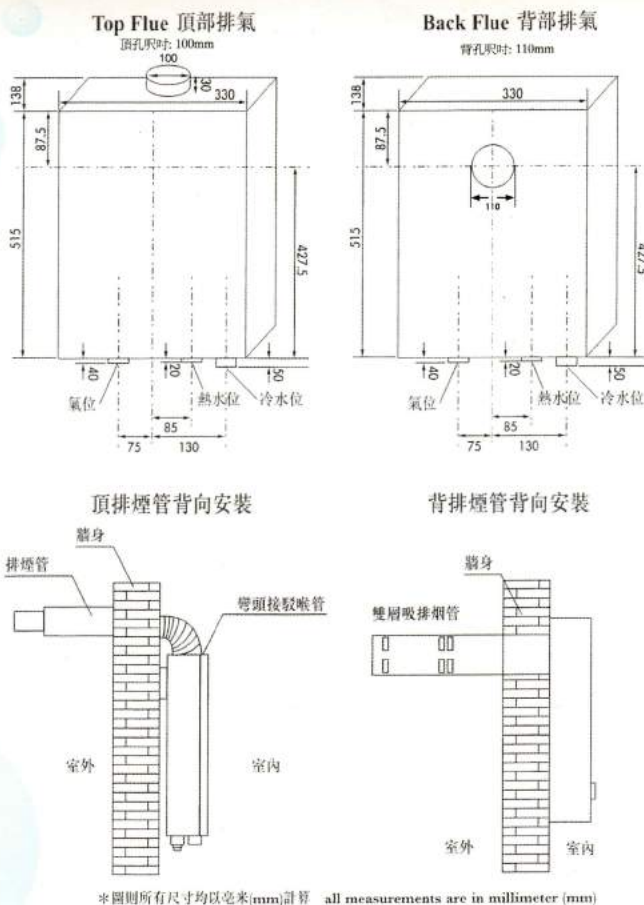

\*圖則所有尺寸均以毫米(mm)計算 all measurements are in millimeter (mm)

產品 Product	氣體熱水爐 Gas water heater		
型號 Model number	<b>AT-10A(GP) 石油氣 LPG</b>		<b>AT-10A(TP) 煤氣 TG</b>
水壓 Water pressure	操作水壓 Operation water pressure		80-700kpa (0.8-7kgf/cm <sup>2</sup> )
	點火水壓 Igniting water pressure		30kpa (0.3kgf/cm <sup>2</sup> )
尺寸 Dimension	515mm高(H) X 330mm寬(W) X 140mm深(D)		
重量 Weight	13公斤 (kg)		
喉管接駁 Pipe Connection	氣體 Gas	半寸 (1/2) 喉牙 R1/2 (PT1/2) 氣體 Gas	
	冷水 Water	半寸 (1/2) 喉牙 R1/2 (PT1/2) 氣體 Gas	
	熱水 Hot water	半寸 (1/2) 喉牙 R1/2 (PT1/2) 氣體 Gas	
電力供應 Power supply	220V (50Hz)		
電壓 Electric	適用氣體 Gas Type	石油氣 LPG	煤氣 TG
	耗電量 Consumption	最大火力 30W 30W at maximum combustion	最大火力 30W 30W at maximum combustion
耗氣量 Gas Consumption	最大 Maximum	79MJ/h (22kw)	72MJ/h (22kw)
	最小 Minimum	24MJ/h (22kw)	24MJ/h (22kw)
出水量 (公升/分鐘) Hot water supply (L/min)	最多溫升 24°C, + 25°C	10	10
	最小溫升 25°C, + 25°C	3.5	3.5
	最多溫升 40°C, + 40°C	6.25	6.25

**Austbo**  
歐の宝

永暉有限公司  
SUNNY ETERNAL LTD.  
歐の宝氣體爐具  
AUSTBO GAS APPLIANCE

地址：香港九龍旺角新填地街470號G二樓  
Address: 2/F., 470 G Reclamation St., Mongkok, Kowloon, Hong Kong  
Tel: (852) 2380 8276, 9423 9137 Fax: (852) 2380 8271  
Website: <http://www.austbo-hk.com> (火力示範)